

KR11 Series Online UPS (1 – 10kVA)



Main Features:

- Online double conversion
- High input power factor
- Wide input voltage range
- Full protection function
- Automatic bypass
- High reliability and performance
- Intelligent RS232 Communication Port
- UPS management software (optional)
- SNMP or USB or Dry contact (optional)
- External battery bank (optional)
- 6kVA & 10kVA have ECO & EPO function
- Output transformer for 6kVA and 10kVA (optional)



Application:

Data Centre, Point-of-Sale, Router, Hub and other Network Device, Commercial Facility, Precision Instrument

Main Specification:

	MODEL	KR1000/KR1000L	KR2000/KR2000L	KR3000/KR3000L	KR6000/KR6000L	KR1110S/KR1110
INPUT	Voltage (Vac)	120-295 (120-140:50% load; 140-160: 75% load; 160-295: 100% load)			120-276 (120-140:50% load; 140-160 75% load; 160-276: 100% load)	
	Frequency (Hz)	50/60 ± 5% (50/60Hz + 10% settings)				
	Power(VA/W)	≥0.99				
OUTPUT	Capacity(VA/W)	1000/700	2000/1400	3000/2100	6000/4800	10000/8000
	Power Factor	0.7 (PF=0.8 or 0.9 optional)			0.8	
	Voltage(Vac)	220/230/240±2%			220/230/240±2% or 110/120±3%	
	Frequency(Hz)	50/60±0.2%(battery mode)				
	Waveform	Pure Sine Wave THD < 3% (linear load)				
	Transfer Time	0				
	Overload	105%~129% for 60 seconds, 130%~150% for 30 seconds, above 150% for 300ms			105%~125% for 10 minutes, 126~150% for 1 minute above 150% for 1 second	
BATTERY	Voltage (Vac)	36	72	96	192	
	Batt Type	3x7Ah12V/External	6x7Ah12V/External	8x7Ah12V/External	16x7Ah12V External	
	Charger Current(A) Max	1/5	1/5	1/5	1/6	
OTHER	Communication Interface	RS232 (dry contact, USB and SNMP adapter are optional)			R232+USB+EPO(Dry contact, SNMP MBS are optional)	
	Display	LED indicates the status of UPS (LCD is optional)			LCD & LED display	
	Alarm	Low battery, abnormal AC input, UPS failure				
	Protection	Low battery, overload, short-circuit and over temperature				
	Noise (dB)	<45			<60	
	Working Temperature	0 ~ 40°C				
	Relative Humidity	0 ~ 95%, No condensation				
	Dimension (WxDxH)mm Standard/Long backup	156 x 400 x 220	198 x 490 x 347		255 x 565 x 700 / 255 x 565 x 500	
	Weight (Kg)	13 / 6.5	25 / 14	29 / 15	69 / 26	70 / 27

Telephone: 07 3390 4622


Specialist Export Services Pty Ltd, 20 Miller Street, Murarrie, QLD, 4172 Facsimile: 07 3390 6600

www.exportservices.com.au


KR11 Series Online UPS (1 – 10kVA)




Australian sockets panel design - KR11 Series UPS 1-3kVA

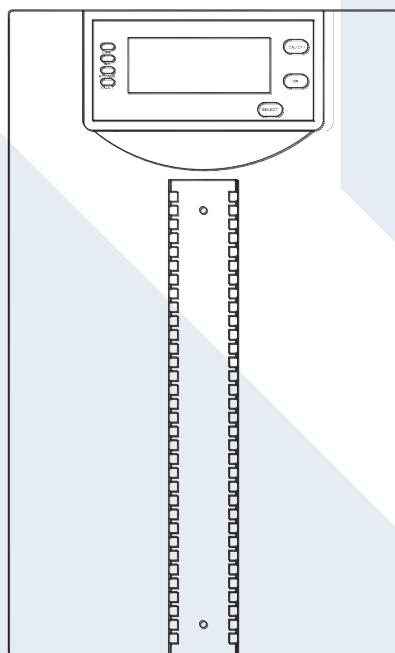

Panel of UPS Series

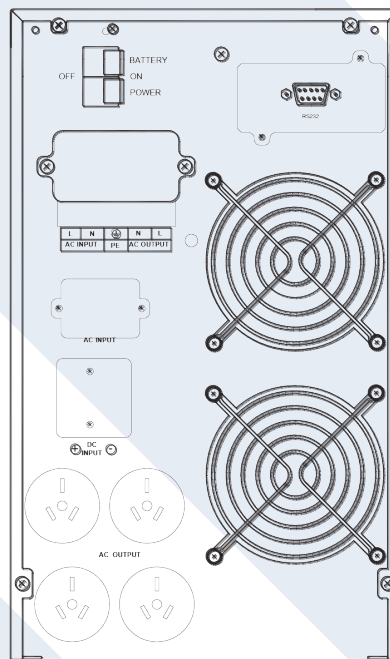

Backboard of UPS KR3000

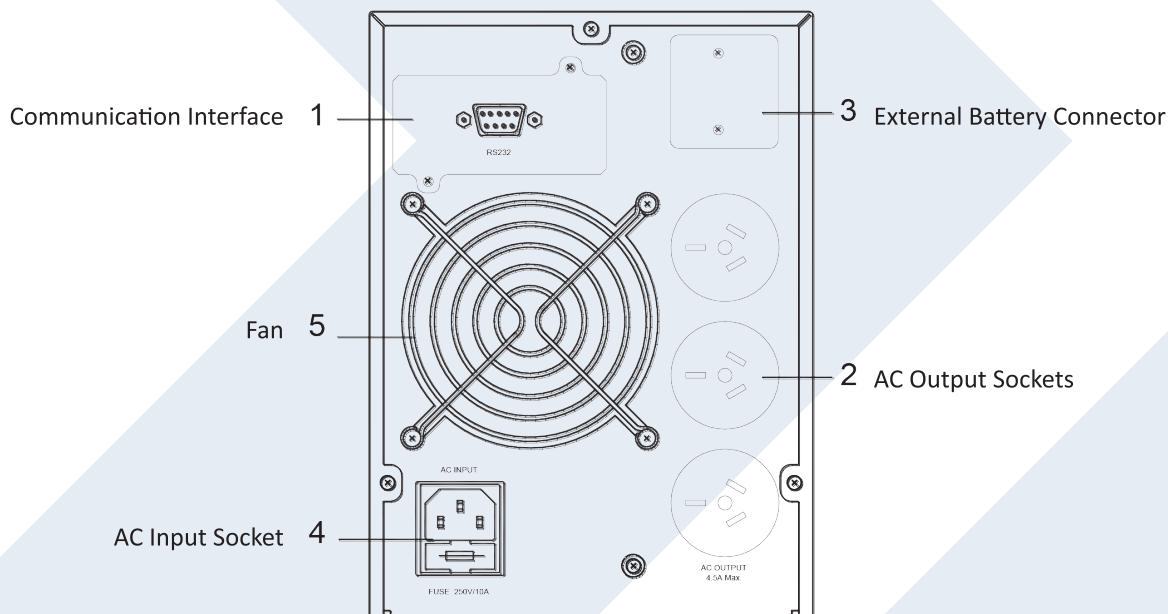

Rear Panel

Backboard of UPS KR1000

Telephone: 07 3390 4622

Specialist Export Services Pty Ltd, 20 Miller Street, Murarrie, QLD, 4172 Facsimile: 07 3390 6600

www.exportservices.com.au