

KR-J Series Online UPS (1 – 10kVA)



Main Features:

- Online double conversion
- Rack and tower convertible for 1-3kVA UPS
- High input power factor
- Wide input voltage range
- Compact and light weight
- Full protection function
- Automatic bypass
- High reliability and performance
- Intelligent RS232 Communication Port
- UPS management software (optional)
- SNMP or USB or Dry contacts (optional)
- External battery bank (optional)
- Tower housing for 1-3kVA (optional)
- Rack Rails (optional)



Application:

19" Rack Device, Data Centre, Router, Commercial Facility, Computer Room, Point-of-Sale, Hub and Network Device, Precision Instrument

Main Specification:

MODEL		KR1000-J/KR1000L-J	KR2000-J/ KR2000L-J	KR3000-J/ KR3000L-J	KR6000-J/ KR6000L-J	KR1110S-J/ KR1110L-J
INPUT	Voltage (Vac)	120-295 (120-140:50% load; 140-160: 75% load; 160-295: 100% load			120-276 (120-140:50% load; 140-160 75% load; 160-276: 100% load	
	Frequency (Hz)	50/60 ± 5% (50/60Hz + 10% settings)				
	Power(VA/W)	≥0.99				
OUTPUT	Capacity(VA/W)	1000/700	2000/1400	3000/2100	6000/4800	10000/8000
	Voltage(Vac)	220/230/240±2%				
	Frequency(Hz)	50/60+0.2%(battery mode)				
	Waveform	Sine Wave THD < 3% (linear load)				
	Transfer Time	0				
	Overload	105%~129% for 60 seconds, 130%~150% for 30 seconds, above 150% for 300ms			105%~125% for 10 minutes, 126~150% for 1 minute above 150% for 1 second	
BATTERY	Voltage (Vac)	36	72	96	192	
	Batt Type	3x7Ah12V/External	6x7Ah12V/External	8x7Ah12V/External	16x7Ah12V External	
	Charger Current(A)Max	1/5	1/4	1/4	1/3	
OTHER	Communication Interface	RS232 (dry contact, USB and SNMP adapter are optional)			R232+USB+EPO(Dry contact, SNMP are optional)	
	Display	LED indicates the status of UPS (LCD is optional)			LCD & LED display	
	Alarm	Low battery, abnormal AC input, UPS failure				
	Protection	Low battery, overload, short-circuit and over temperature				
	Working Temperature	0 ~ 40°C				
	Relative Humidity	0 ~ 95%, No condensation				
	Dimension (WxDxH)mm Standard/Long backup	440 x 500 x 2U	440 x 500 x 2U(UPS) + 440 X 500 X 2U (Battery pack)/440 x 500 x 2U(UPS)		440 x 550 x 3U(UPS) + 440 X 550 X 3U (Battery pack)/440 x 550 x3U(UPS)	
	Weight (Kg) Standard/Long backup	14 / 7	10+22/12	11+28/13	18+48/18	19+48/19

Telephone: 07 3390 4622

Specialist Export Services Pty Ltd, 20 Miller Street, Murarrie, QLD, 4172 Facsimile: 07 3390 6600

www.exportservices.com.au


KR-J Series Online UPS (1 – 10kVA)



Australian sockets panel design - KR-J Series UPS 1-3KVA 1000VA


1000VA Rear Panel

1. DC Input Cover
2. DC Input Port
3. AC Input Socket
4. AC Output Socket
5. Fan
6. Communication Interface

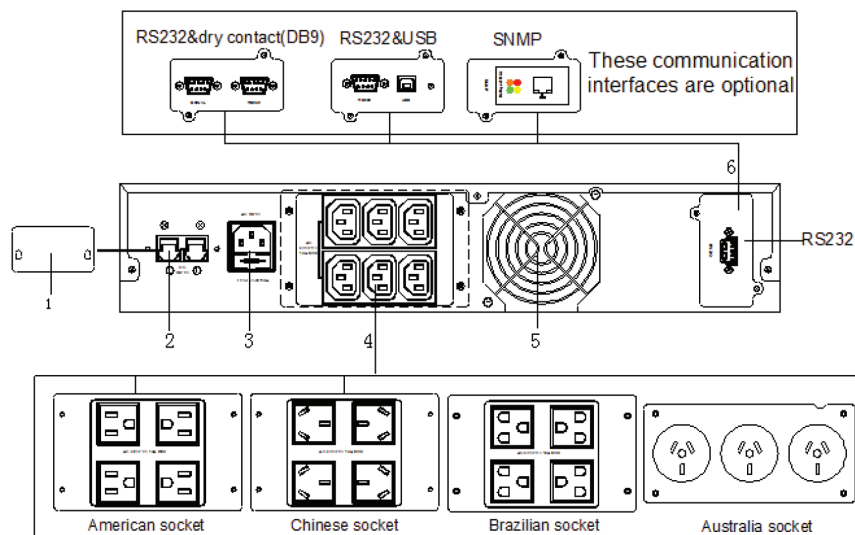

2000VA/3000VA Rear Panel

1. DC Input Cover
2. DC Input Port
3. Fan
4. AC Output Socket
5. Communication Interface

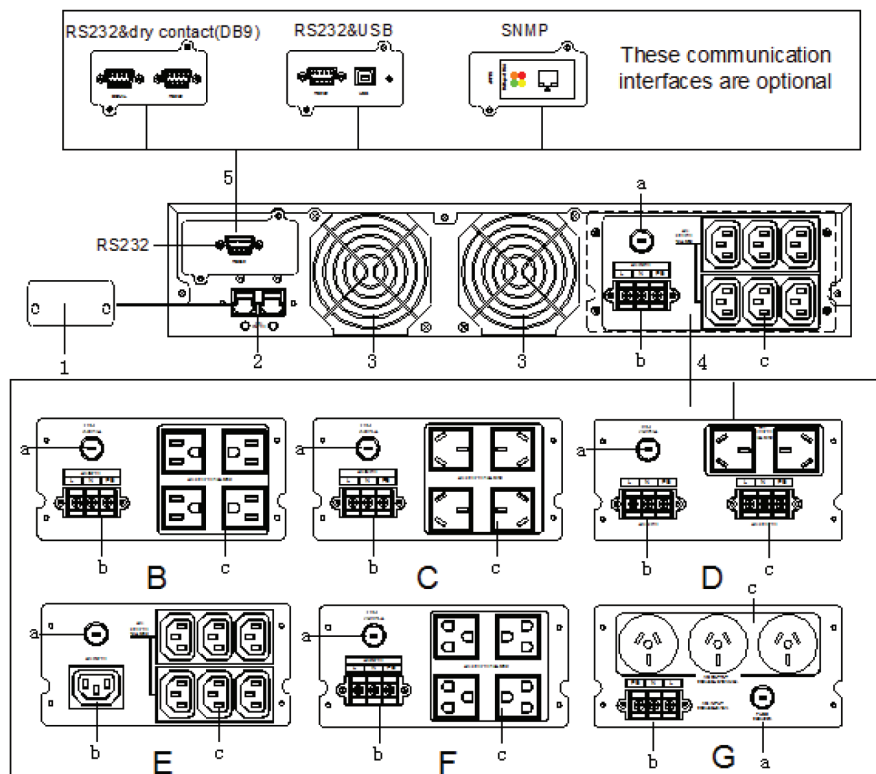

Telephone: 07 3390 4622

Specialist Export Services Pty Ltd, 20 Miller Street, Murarrie, QLD, 4172 Facsimile: 07 3390 6600

www.exportservices.com.au